


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=35mm
- ◆ 宽带增透膜，提高透光性能
- ◆ 5 百万像素高精密成像
- ◆ 高分辨率、大景深、无畸变
- ◆ 紧凑外形小，抗震性能好
- ◆ 适用工业检测，工业自动化等



产品规格书:

500 万像素 35mm 工业镜头 C Mount		物距	倍率	视野 2/3"(mm)		
型号 Model	<b>FM3518MP5</b>	mm	-	H	V	
像机尺寸 Image Size	2/3-inch	2000	0.018X	496.7	372.5	
焦距 Focal length	35mm	1000	0.035X	251.4	188.6	
光圈范围 F No.	F1.8-16	900	0.039X	226.3	169.7	
最短物距 M.O.D(m)	0.2-Inf.	850	0.041X	213.7	160.3	
控制方式 Operation	Iris	Manual 手动调整	800	0.044X	201.1	150.9
	Focus	Manual 手动调整	750	0.047X	188.6	141.4
视场角 Angle of View (D×H×V)	2/3"	17.9°×14.3°×10.8°	700	0.050X	176.0	132.0
	1/1.8"	14.4°×11.6°×8.7°	650	0.054X	163.4	122.6
	1/2"	13°×10.4°×7.8°	600	0.058X	150.9	113.1
	1/2.9"	10.1°×8.8°×4.9°	550	0.064X	138.3	103.7
畸变 TV Distortion	-0.01%	500	0.070X	125.7	94.3	
光学后焦 BFL	15.21mm	450	0.078X	113.1	84.9	
法兰距 Flange FL	17.526mm	400	0.088X	100.6	75.4	
接口 Mount	C-Mount	350	0.100X	88.0	66.0	
近摄视野 2/3"FOV	75.4mm×56.6mm(WD=300mm)	300	0.117X	75.4	56.6	
外形尺寸 Dimension	Φ29×33mm	280	0.125X	70.4	52.8	
重量 Weight	71.0g	250	0.140X	62.9	47.1	
分辨率 Resolution	5.0MP	200	0.175X	50.3	37.7	
滤镜尺寸 Filter	M27 P=0.5mm	150	0.233X	37.7	28.3	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.350X	25.1	18.9	

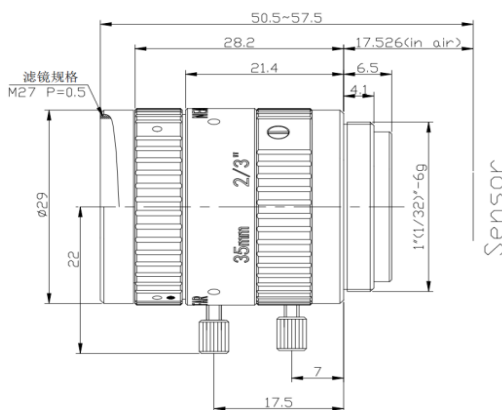