


- ◆ 品牌：中联科创 (ZLKC)
- ◆ 规格：4/3" C 型 f=12mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.1%
- ◆ 适用机器视觉, 工业监控等



产品规格书:

2000 万像素 12mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3" Field of View(mm)		
型号 Model	KM1228MP20	mm	X	H	V	
相机靶面 Image Size	4/3-inch	5000	0.002X	7158.8	5369.1	
焦距 Focal length	12mm	2000	0.006X	2883.7	2162.8	
光圈范围 F No.	F2.8-22	1000	0.012X	1458.6	1094.0	
最短物距 M.O.D(m)	0.1-Inf.	900	0.013X	1316.1	987.1	
控制方式 Operation	Iris	Manual 手动调整	800	0.015X	1173.6	880.2
	Focus	Manual 手动调整	700	0.017X	1031.1	773.4
视场角 Angle of View (DxHxV)	4/3"	83.4°x71.2°x56.3°	600	0.020X	888.6	666.5
	1"	66.1°x54.8°x42.3°	550	0.022X	817.4	613.0
	2/3"	47.9°x38.9°x29.6°	500	0.024X	746.1	559.6
畸变 Distortion	<1%	450	0.026X	674.9	506.2	
光学后焦 BFL	10.6mm	400	0.029X	603.6	452.7	
接口 Mount	C-Mount	350	0.033X	532.4	399.3	
近摄视野 Object Dimension	461.1mmx345.8mm(WD=300mm)	300	0.038X	461.1	345.8	
外形尺寸 Dimension	Φ48x67.8mm	250	0.045X	389.9	292.4	
重量 Weight	245.0g	200	0.056X	318.6	238.9	
滤镜尺寸 Filter Thread	—	150	0.072X	247.4	185.5	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.103X	176.1	132.1	

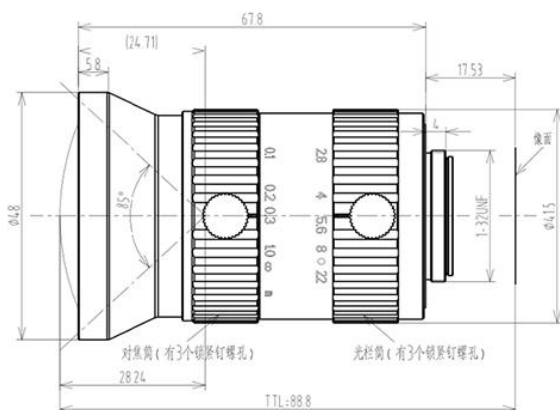