


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=16mm
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 兼容可见光和红外波段适用



产品规格书：

800 万像素 16mm 工业镜头 C Mount		物距 Working Distance	倍率 Magnifi cation	视野 2/3"Field of View(mm)		
型号 Model	VM1628MP8	mm	X	横边 H	纵边 V	
像机尺寸 Image Size	2/3-inch	1000	0.016X	550.0	412.5	
焦距 Focal length	16mm	900	0.018X	495.0	371.3	
光圈范围 F No.	F2.8-16	850	0.019X	467.5	350.6	
最短物距 M.O.D(m)	0.1-Inf.	800	0.020X	440.0	330.0	
控制方式 Operation	Iris	Manual 手动调整	750	0.021X	412.5	309.4
	Focus	Manual 手动调整	700	0.023X	385.0	288.8
视场角 Angle of View (D×H×V)	2/3"	30.8°×23.1°	650	0.025X	357.5	268.1
	1/1.7"	26.5°×20.0°	600	0.027X	330.0	247.5
	1/1.8"	25.3°×19.2°	550	0.029X	302.5	226.9
	1/2"	22.6°×17.1°	500	0.032X	275.0	206.3
畸变 TV Distortion	-0.12%	450	0.036X	247.5	185.6	
法兰距 Flange FL	17.526mm	400	0.040X	220.0	165.0	
接口 Mount	C-Mount	350	0.046X	192.5	144.4	
近摄视野 2/3"FOV	82.5mm×61.9mm(WD=150mm)	300	0.053X	165.0	123.8	
外形尺寸 Dimension	Φ32×46mm	280	0.057X	154.0	115.5	
重量 Weight	76.3g	250	0.064X	137.5	103.1	
分辨率 Resolution	8MP	200	0.080X	110.0	82.5	
滤镜尺寸 Filter	M27 P=0.5mm	150	0.107X	82.5	61.9	
工作温度 Working Temperature	-20℃ ~ +60℃	100	0.160X	55.3	41.4	

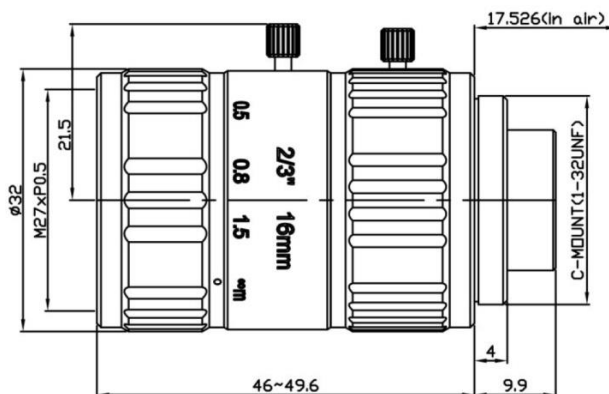