


- ◆ 品牌：中联科创 (ZLKC)
- ◆ 规格：4/3" C 型 f=50mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.1%
- ◆ 适用机器视觉, 工业监控等



产品规格书:

2000 万像素 50mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3" Field of View(mm)		
型号 Model	KM5028MP20	mm	X	H	V	
相机靶面 Image Size	4/3-inch	5000	0.010X	1721.3	1292.5	
焦距 Focal length	50mm	2000	0.026X	682.9	512.7	
光圈范围 F No.	F2.8-22	1000	0.052X	341.4	256.2	
最短物距 M.O.D(m)	0.3-Inf.	900	0.057X	306.6	230.0	
控制方式 Operation	Iris	Manual 手动调整	800	0.065X	272.5	204.5
	Focus	Manual 手动调整	750	0.069X	255.2	191.5
视场角 Angle of View (DxHxV)	4/3"	24.8°x19.8°x14.9°	700	0.074X	237.9	178.5
	1"	18.2°x14.6°x10.9°	650	0.080X	220.5	165.4
	2/3"	12.6°x10.1°x7.5°	600	0.087X	203.2	152.4
畸变 Distortion	<0.02%	550	0.095X	185.8	139.4	
光学后焦 BFL	21.1mm	500	0.105X	168.4	123.6	
接口 Mount	C-Mount	450	0.117X	151.0	113.2	
近摄视野 Object Dimension	168.4mmx123.6mm(WD=500 mm)	400	0.132X	133.5	100.1	
外形尺寸 Dimension	Φ38x53.9mm	350	0.152X	116.0	87.0	
重量 Weight	126.8g	300	0.179X	98.6	73.9	
滤镜尺寸 Filter Thread	M35.5x 0.5	-	-	-	-	
工作温度 Working Temperature	-20°C ~ +60°C	-	-	-	-	

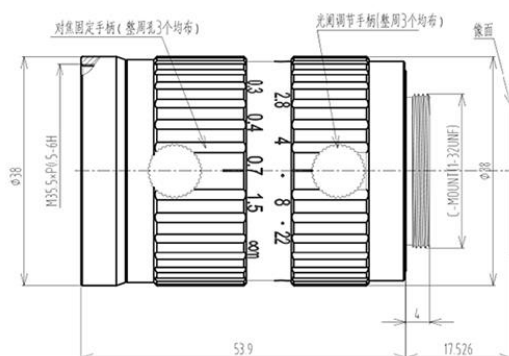