


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=50mm
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 兼容可见光和红外波段适用

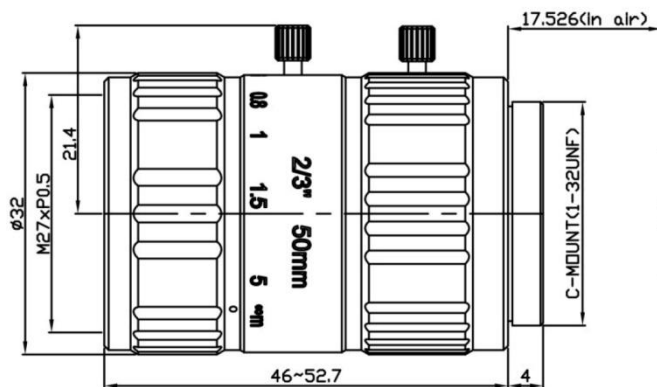

产品规格书：

800 万像素 50mm 工业镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)		
型号 Model	VM5028MP8	mm	X	横边 H	纵边 V	
像机尺寸 Image Size	2/3-inch	1200	0.042X	212.2	159.1	
焦距 Focal length	50mm	1000	0.050X	176.8	132.6	
光圈范围 F No.	F2.8-16	900	0.055X	161.7	121.2	
最短物距 M.O.D(m)	0.25-Inf.	850	0.058X	152.5	114.4	
控制方式 Operation	Iris	Manual 手动调整	800	0.061X	143.3	107.5
	Focus	Manual 手动调整	750	0.066X	134.2	100.6
视场角 Angle of View (D×H×V)	2/3"	10.1°×7.6°	700	0.070X	125.0	93.7
	1/1.7"	8.6°×6.5°	650	0.076X	115.8	86.9
	1/1.8"	8.1°×6.1°	600	0.083X	106.7	80.0
	1/2"	7.3°×5.5°	550	0.090X	97.5	73.1
畸变 TV Distortion	-0.01%		500	0.100X	88.3	66.2
法兰距 Flange FL	17.526mm		450	0.111X	79.2	59.4
接口 Mount	C-Mount		400	0.126X	70.0	52.5
近摄视野 2/3"FOV	51.7mm×38.7mm(WD=300mm)		350	0.145X	60.8	45.6
外形尺寸 Dimension	Φ32×46mm		300	0.170X	51.7	38.7
重量 Weight	68.0g		250	0.207X	42.5	31.9
分辨率 Resolution	8MP		200	0.264X	33.3	25.0
滤镜尺寸 Filter	M27 P=0.5mm		150	0.364X	24.2	18.1
工作温度 Working Temperature	-20°C ~ +60°C		100	0.587X	15.0	11.1