


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=50mm
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 兼容可见光和红外波段适用



产品规格书：

800 万像素 50mm 工业镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)		
型号 Model	VM5028MP8	mm	X	横边 H	纵边 V	
像机尺寸 Image Size	2/3-inch	1200	0.042X	212.2	159.1	
焦距 Focal length	50mm	1000	0.050X	176.8	132.6	
光圈范围 F No.	F2.8-16	900	0.055X	161.7	121.2	
最短物距 M.O.D(m)	0.25-Inf.	850	0.058X	152.5	114.4	
控制方式 Operation	Iris	Manual 手动调整	800	0.061X	143.3	107.5
	Focus	Manual 手动调整	750	0.066X	134.2	100.6
视场角 Angle of View (DxHxV)	2/3"	10.1°x7.6°	700	0.070X	125.0	93.7
	1/1.7"	8.6°x6.5°	650	0.076X	115.8	86.9
	1/1.8"	8.1°x6.1°	600	0.083X	106.7	80.0
	1/2"	7.3°x5.5°	550	0.090X	97.5	73.1
畸变 TV Distortion	-0.01%	500	0.100X	88.3	66.2	
法兰距 Flange FL	17.526mm	450	0.111X	79.2	59.4	
接口 Mount	C-Mount	400	0.126X	70.0	52.5	
近摄视野 2/3"FOV	51.7mmx38.7mm(WD=300mm)	350	0.145X	60.8	45.6	
外形尺寸 Dimension	Φ32x46mm	300	0.170X	51.7	38.7	
重量 Weight	68.0g	250	0.207X	42.5	31.9	
分辨率 Resolution	8MP	200	0.264X	33.3	25.0	
滤镜尺寸 Filter	M27 P=0.5mm	150	0.364X	24.2	18.1	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.587X	15.0	11.1	

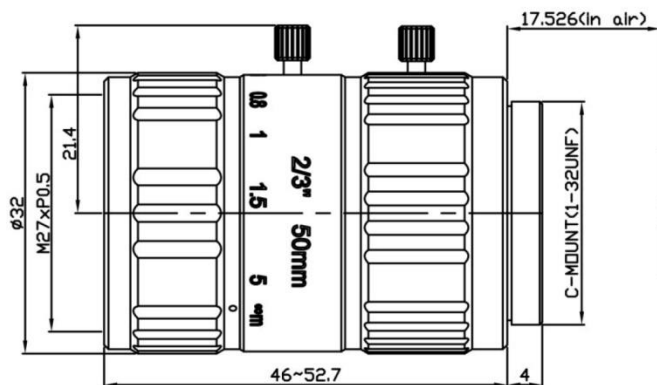